

FIGURE 1

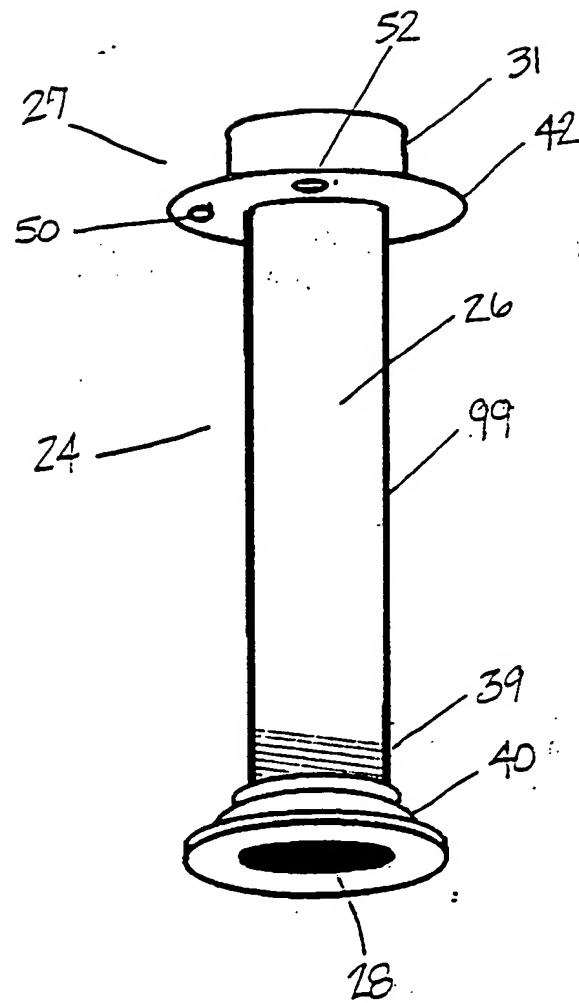


FIGURE 2

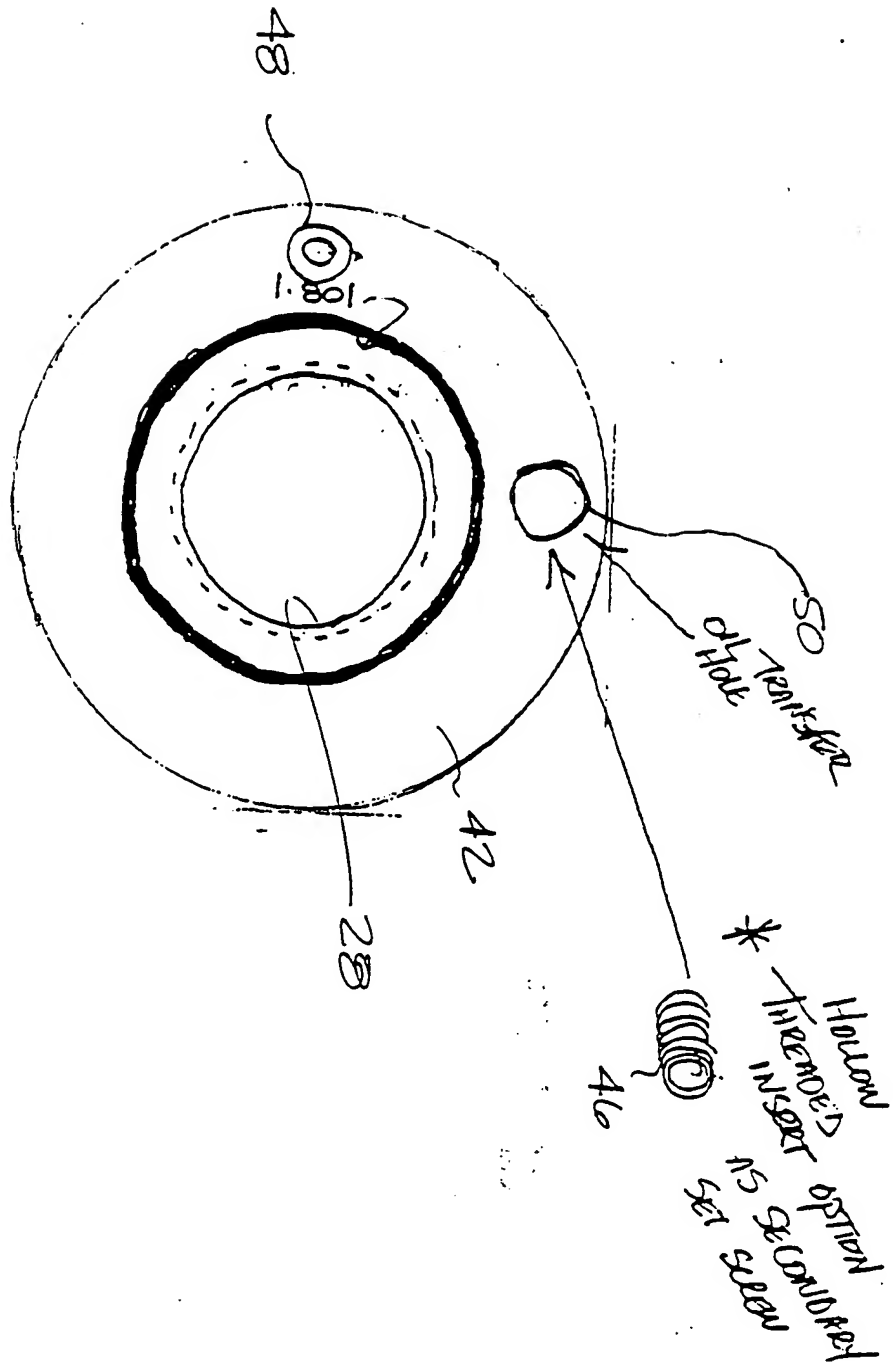


FIGURE 2A

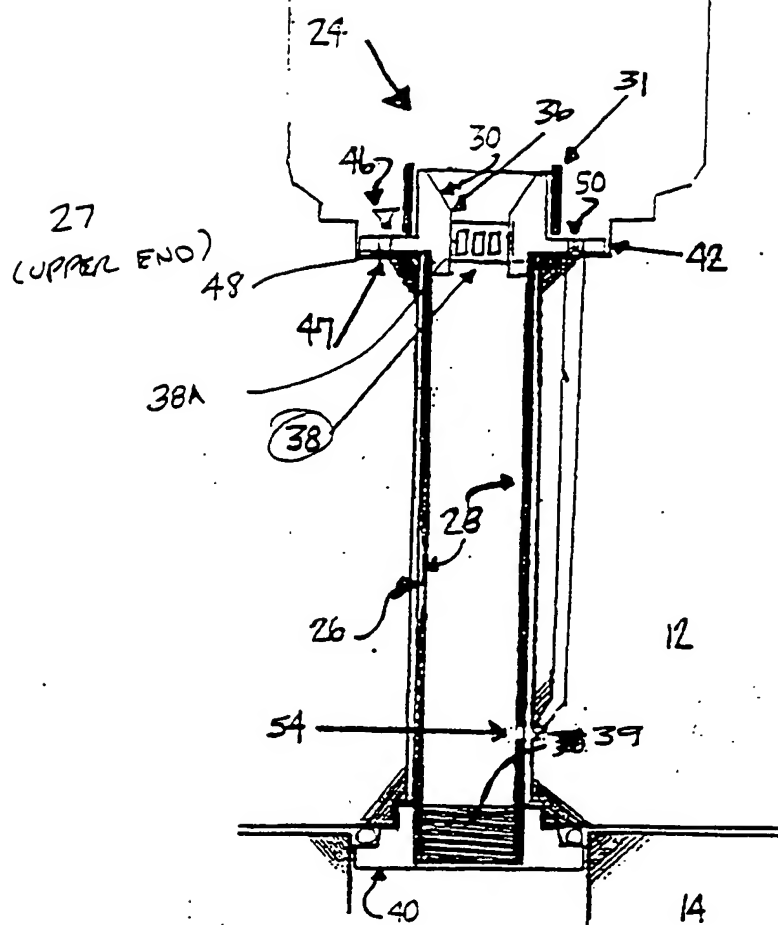


FIGURE 3

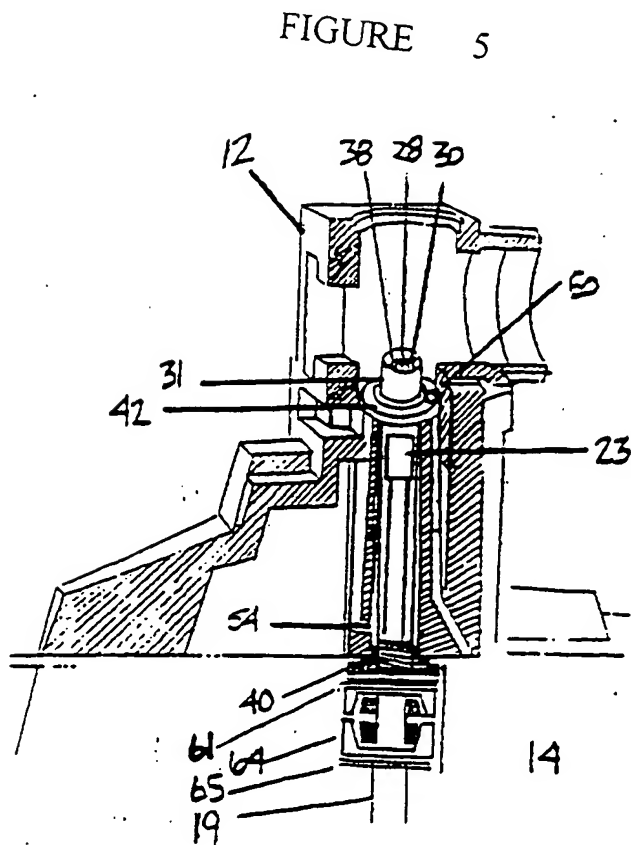


FIGURE 5

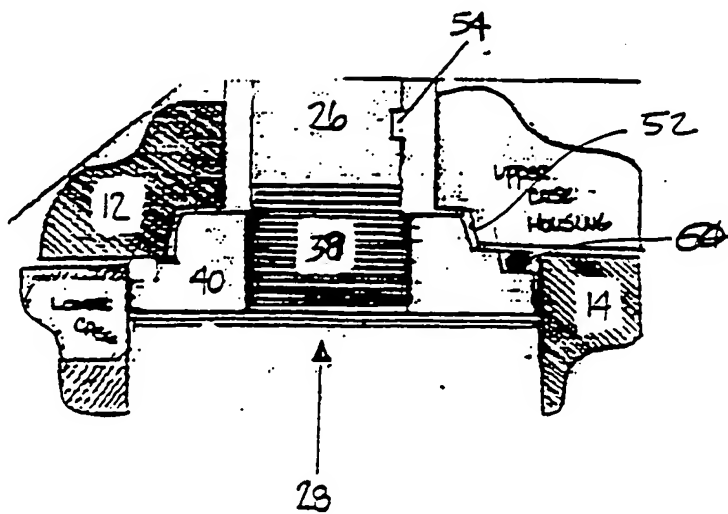


FIGURE 4

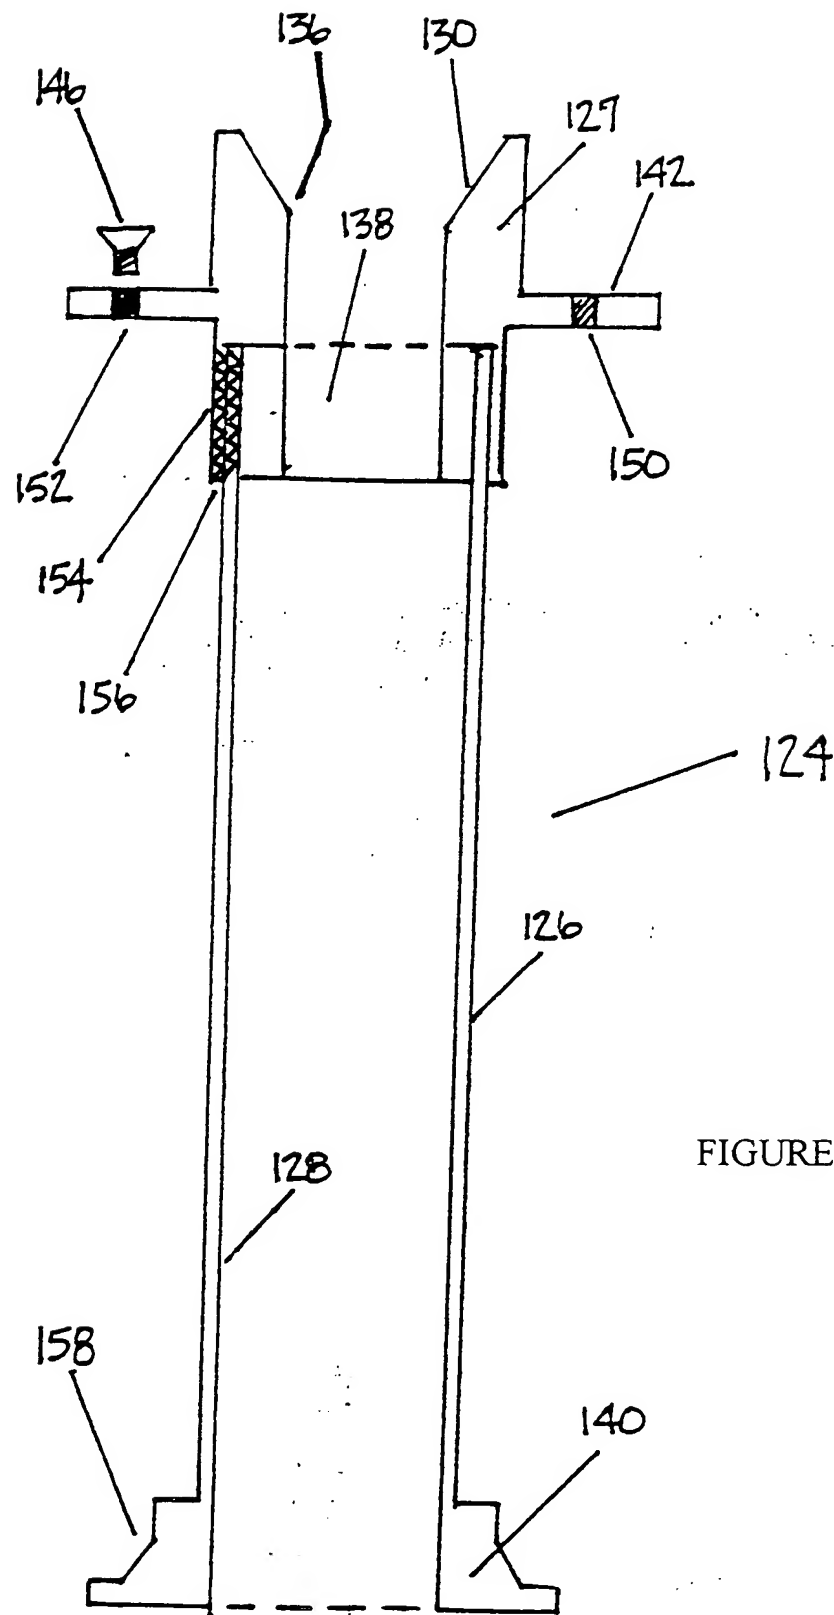
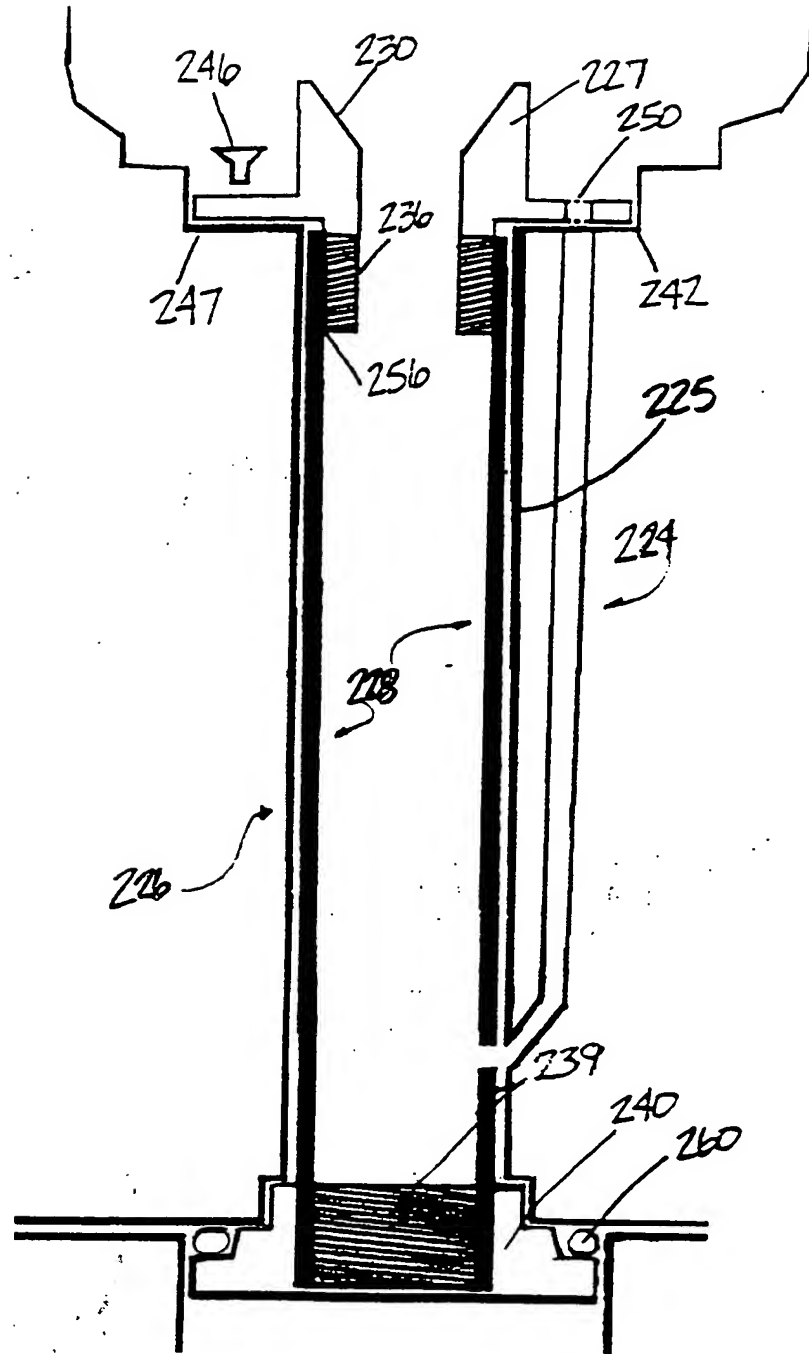


FIGURE 7



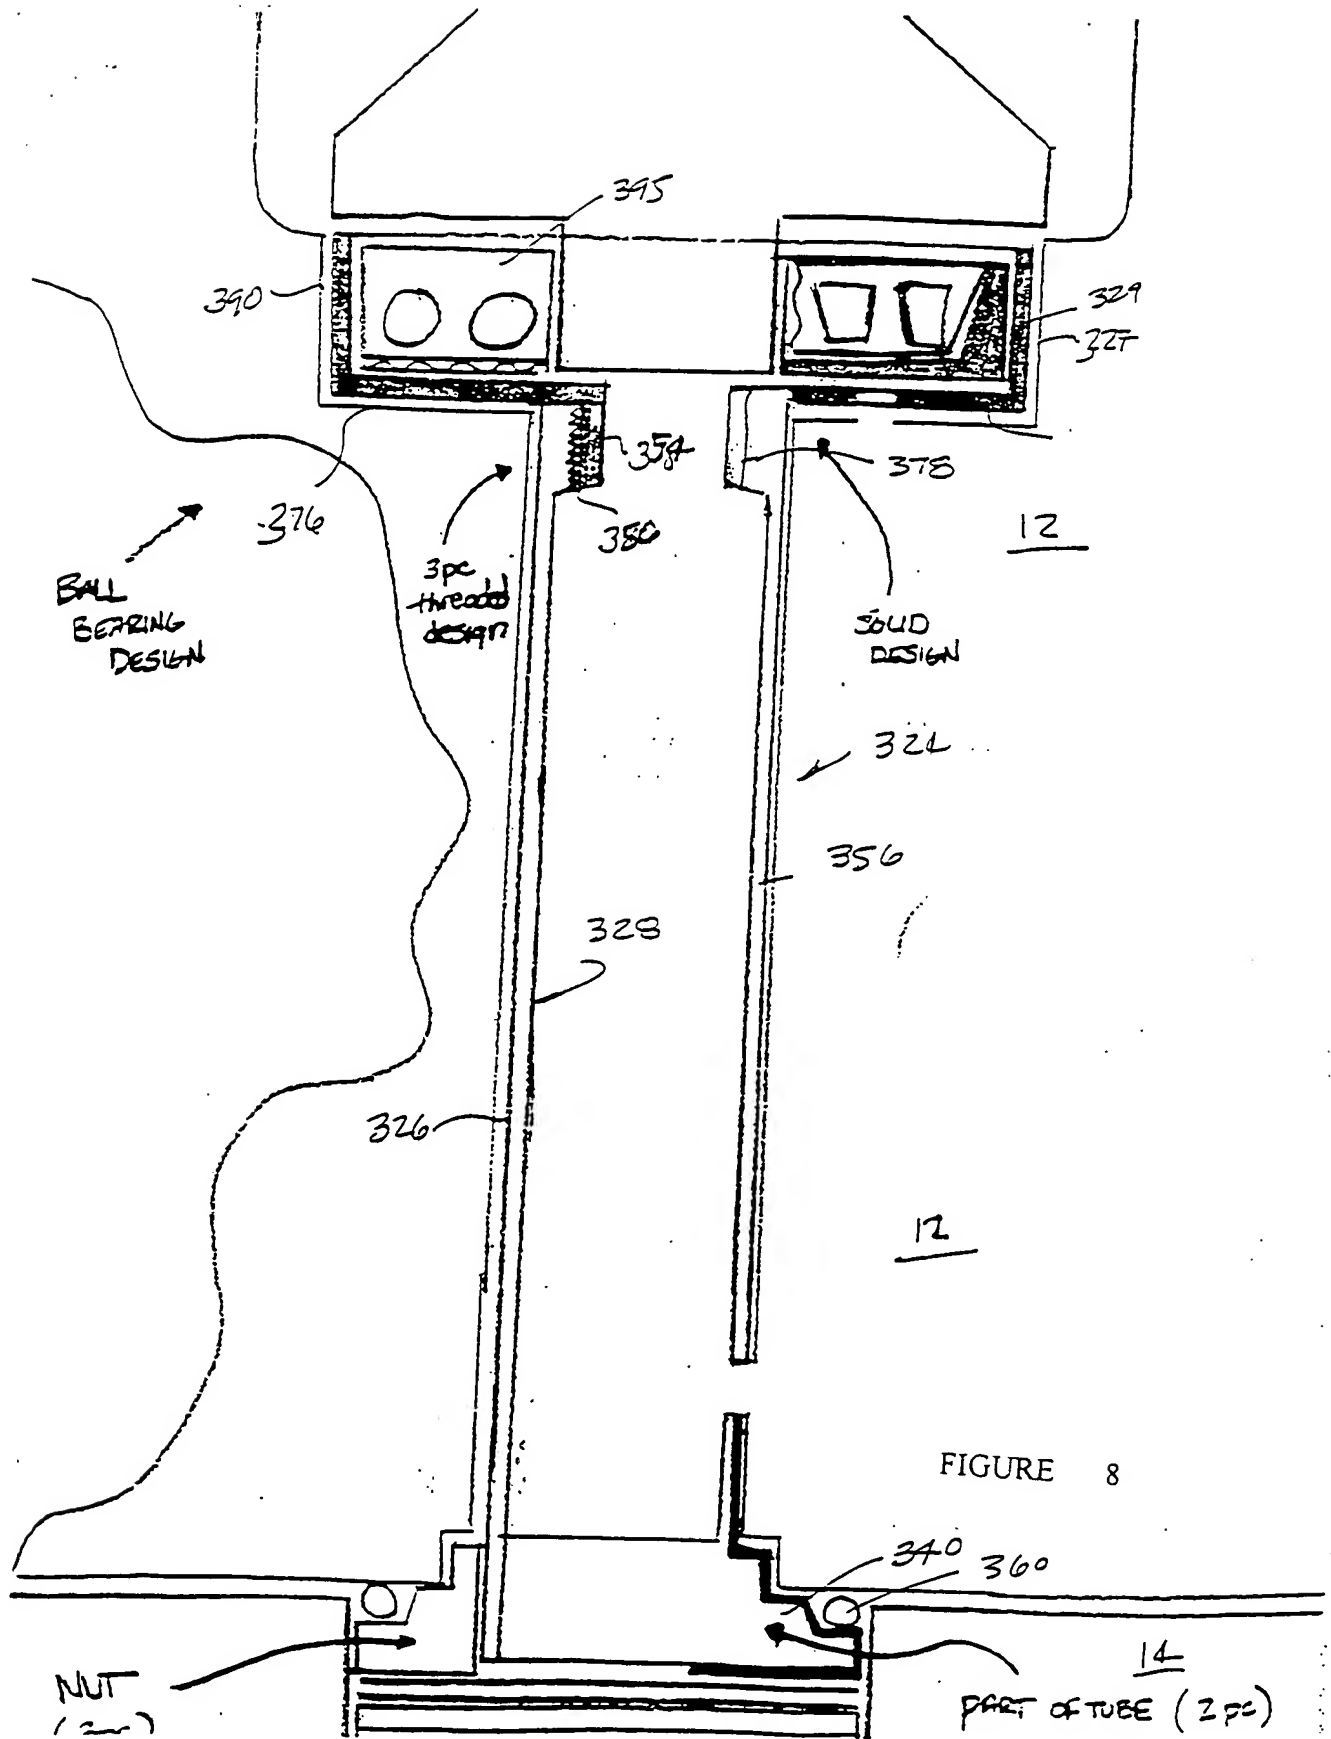


FIGURE 8

# DESIGNS tower

A 1-3  
B 1-3  
C 1-3

10/11/97  
M. J. G. + J. R.  
epid

W. J. C.

Cur'D

...  
...  
...

1

FIGURE 9

Cut A

**Removes cast aluminum bearing/gear support for chromoly bearing tower & case support**

**Cut B**

Removes .100-200" in depth @ 3.20 dia for tower disc section & setscrew is drilled and threaded

Cul C

60° chamfer cut for  
precise fit

Cut D

**Removes top of taper casting to 1.580" - 1.65" to accept chromoly tower shim/sleeve insert through upper case for additional support**



# CASE CUTS FOR TOWER DESIGNS D1-5.

TOP OF CASE (UPPER)

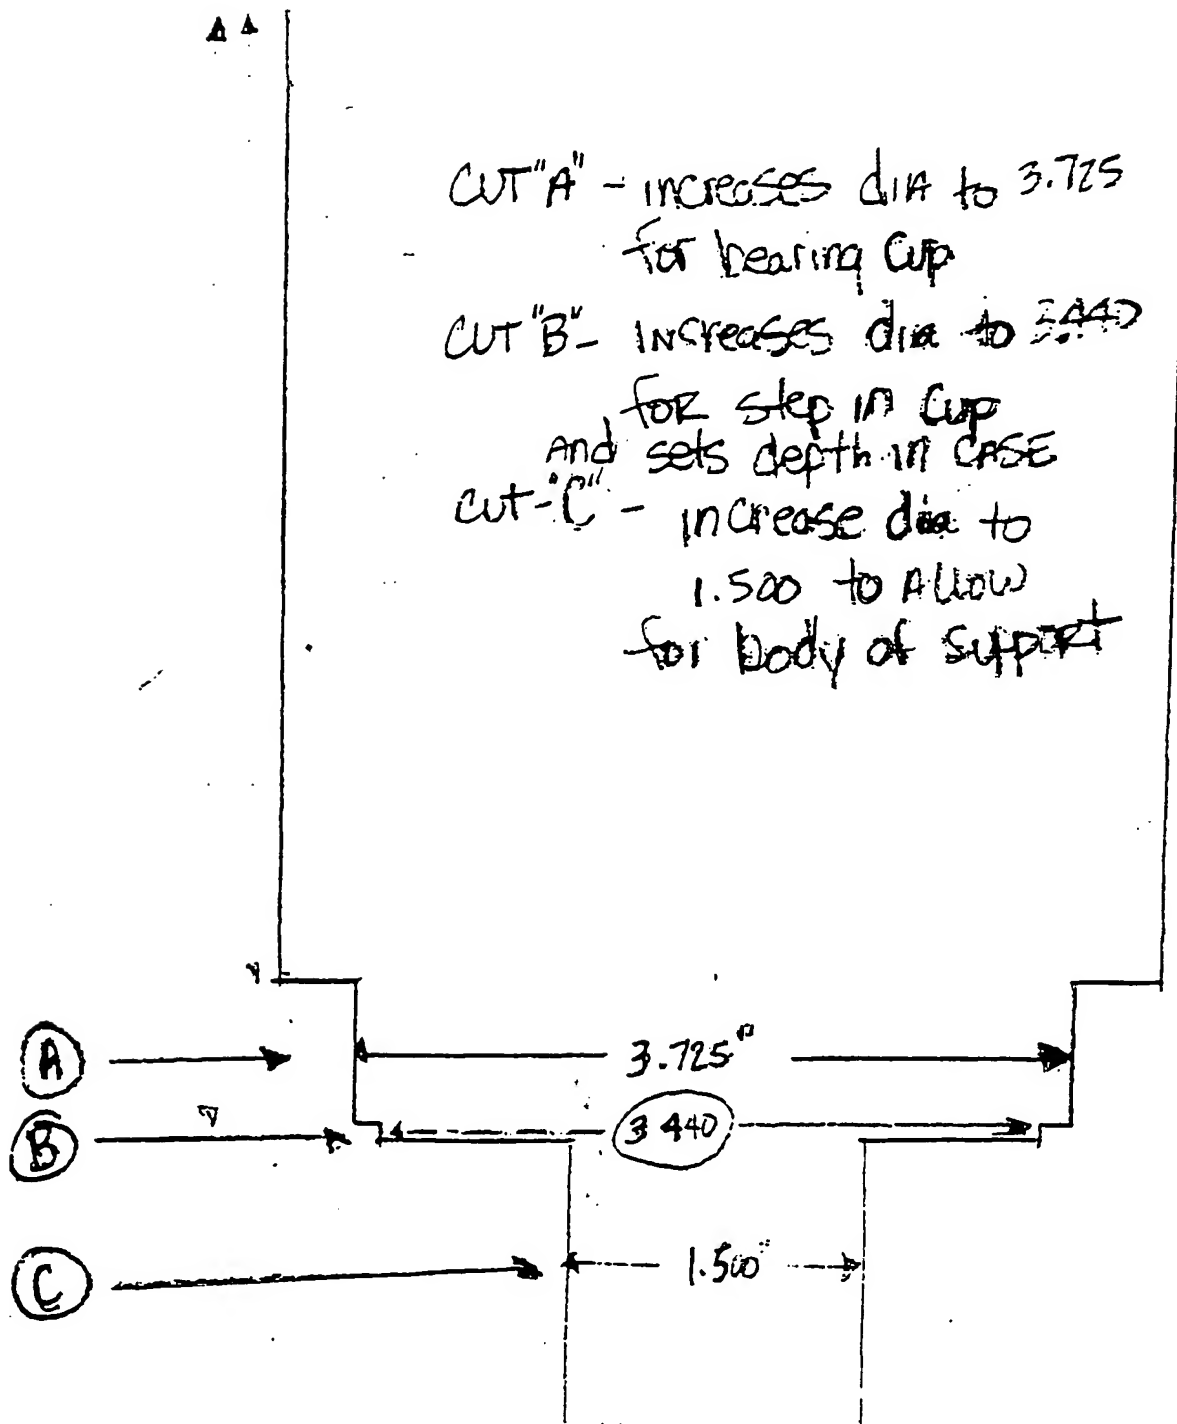


FIGURE 10